


带表头系列/中高功率风冷探头

- ☆ 光谱波长范围: 0.19-11um
- ☆ 校准波长范围: 0.19-2.1um, 2.94um, 9-11um
- ☆ 校正NIST溯源
- ☆ 优化热沉设计, 高承载功率
- ☆ 方形探头, 易集成, 可以方便的安装到设备
- ☆ 连接方式: 表头LA Pro

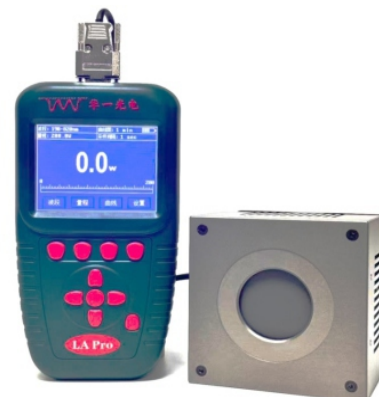

Model/型号	LA Pro-TP200-HP-25	LA Pro-TP200-HP-50	LA Pro-TP300-HP-50	LA Pro-TP500-HP-25	LA Pro-TP500-HP- 50	LA Pro-TP1000-HP-50	LA Pro-TP1500-HP-50
Max.Average Power /最大平均功率	200W		300W	500W		1000W	1500W
Min.Power/最小功率	0.1W		0.3W	0.5 W		1 W	1.5 W
Power Resolution /功率分辨率	0.1W						
Noise Equivalent Power /噪声等效功率	0.2W						
Response Time/响应时间	2S				5S		
Power Calibration Uncertainty/校准头确定度	±3%						
Power Linearity(1)线性度	±1%						
Aperture/接收口径	25mm	50mm	25mm	50mm	25mm	50mm	
Type/传感器镀膜层	HPB						
Max.Power Density /损伤阈值	5KW/cm² @200W						
Cooling/冷却方式	风冷						
Dimension/尺寸	90X90X70		122X122X118				
Weight Dimension/重量	2KG		2.2KG		3KG		
Cable length-connector /探头线缆长度	2M						