


150W水冷功率计

- ✧ 快速响应 (150W探头, 0%-95%)
响应时间1.8S)
- ✧ 极高损伤阈值, 5kW/cm²@150W
- ✧ 波长范围:0.19-11um
- ✧ 校正NIST溯源
- ✧ 外形小巧
- ✧ 优化热沉设计, 高承载功率
- ✧ 方形探头, 易集成, 可以方便安装到设备
- ✧ 光学配件安装螺纹

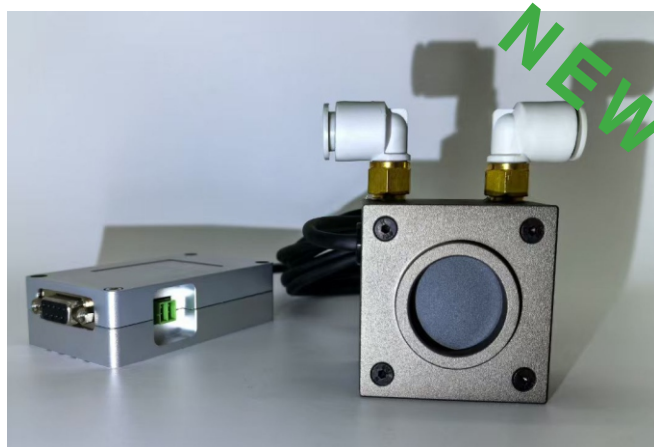

Model	Lynk-RS232-W150-HP-19 NEW	Lynk-USB-W150-HP-19 NEW
Max. Average Power	150W	150W
Min. Power	0.1W	0.1W
Power Resolution	0.1W	0.1W
Noise Equivalent Power (NEP)	0.2W	0.2W
Response Time	1.8 S	1.8 S
Power Calibration Uncertainty	± 3%	± 3%
Power Linearity (1)	± 1%	± 1%
Aperture	25mm	50mm
Type	HPB	HPB
Absorber Specs		
Absorber Spectral Range	0.19 - 11 μm	0.19 - 11 μm
Calibration Spectral Range	0.19 - 2.1 μm, 2.94μm, 9 - 11 μm	0.19 - 2.1 μm, 2.94μm, 9 - 11 μm
Max Power Density (2)	5kW/cm ² @150W	5kW/cm ² @150W
General Characteristics		
Cooling	Conduction (a)	Conduction (a)
Weight Dimension	1 kg	1 kg
Dimension	50X50X38mm	50X50X38mm
Cable lenght - connector	2m	2m

Notes (1). Detector centrally irradiated @50% of useful surface.

(2). Damage thresholds also depend on power level. Please see damage graphs for more details.

Copyright ©2017 Shenzhen Huaone Light Co.,Ltd

www.huaonelight.com allen@huaonelight.com 黄经理 18211550400